



PRODUCT CATALOG

USA

RESISTO®



RESISTO, a division of SOPREMA, specializes in manufacturing residential and light commercial construction products. Whether for roofing, waterproofing, wall systems or insulation, RESISTO provides easy-to-install, innovative and professional-level products and solutions for both below and above grade applications. Each year, thousands of contractors and consumers choose RESISTO for the quality of its products and its personalized service.

WARRANTIES

Choosing RESISTO is a guarantee of reliability. As proof of the unique performance level of its products, RESISTO offers comprehensive warranty programs that live up to its reputation and expertise.

Representative: _____

Phone: _____

Email: _____



TABLE OF CONTENTS

SYSTEMS	4
ROOFING	6
WATERPROOFING	14
WALL SYSTEMS	16
ACCESSORIES	19
INSULATION	22
SOPREMA INSULATION	26
SOPREMA SOUNDPROOFING	34
SOPREMA ALSAN FOAMS AND SEALANTS	38

RESISTO
SYSTEMS



RESISTO

TWO-PLY SA BASE + SA CAP FR GR

ONLY UL 790 CLASS A CERTIFIED SYSTEM

THE RESISTO TWO-PLY ROOFING SYSTEM IS GUARANTEED FOR 20 YEARS AGAINST ALL MANUFACTURING DEFECTS.

THIS WARRANTY APPLIES TO LOW-SLOPE OR VERY LOW SLOPE RESIDENTIAL ROOFS WITH SLOPES UP TO 1/2:12 OR 4% THAT DRAIN TO THE OUTSIDE EDGE AND THAT DO NOT HAVE INTERNAL ROOF DRAINS.

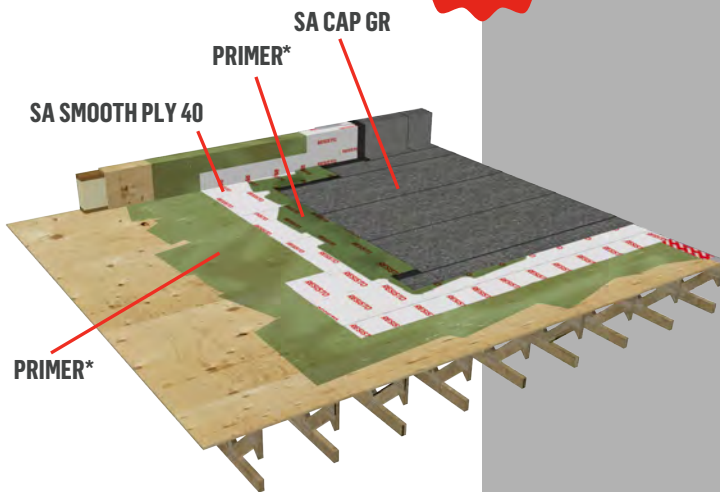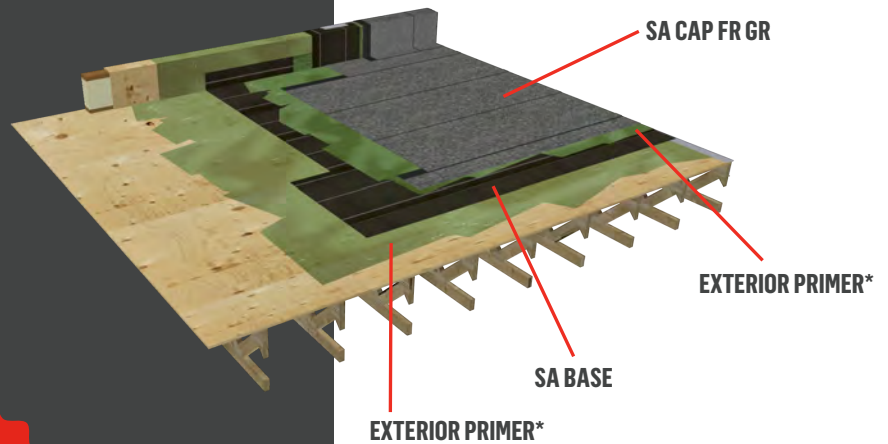

TWO-PLY SA SMOOTH PLY 40 + SA CAP GR

THE RESISTO TWO-PLY ROOFING SYSTEM IS GUARANTEED FOR 20 YEARS AGAINST ALL MANUFACTURING DEFECTS.


THIS WARRANTY APPLIES TO LOW-SLOPE OR VERY LOW SLOPE RESIDENTIAL ROOFS WITH SLOPES FROM 1/8:12 OR 1% THAT DRAIN TO THE OUTSIDE EDGE AND THAT DO NOT HAVE INTERNAL ROOF DRAINS.

THREE-PLY SA NAILBASE + SA SMOOTH PLY 40 + SA CAP GR

A UL 790 CLASS C RATED SYSTEM FAST AND EASY TO INSTALL

THE RESISTO THREE-PLY ROOFING SYSTEM IS GUARANTEED FOR 25 YEARS AGAINST ALL MANUFACTURING DEFECTS.

THIS WARRANTY APPLIES TO LOW-SLOPE OR VERY LOW SLOPE RESIDENTIAL ROOFS WITH SLOPES FROM 1/8:12 OR 1% UP, THAT DRAIN TO THE OUTSIDE EDGE AND THAT DO NOT HAVE INTERNAL ROOF DRAINS.

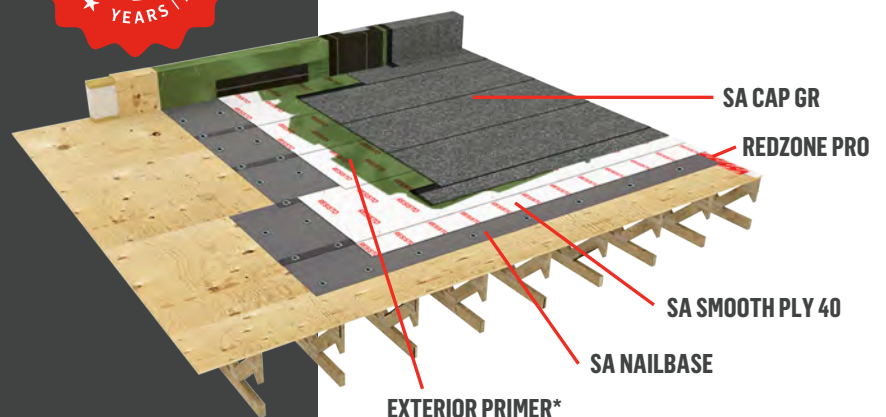

*Primer is always recommended. Primer is required on some substrates such as concrete, metal and surfaces that are not ideally clean. See our TDI, FBC and Miami-Dade approvals for requirements and wind uplift ratings.

SA NAILBASE could be replaced by another layer of SA SMOOTH PLY 40 and still be GUARANTEED for 25 years.

ROOFING



ROOFING

ICE AND WATER PROTECTOR

LB1236/LB1244

LB1236 is a 53 mils self-adhesive waterproofing membrane made of elastomeric SBS bitumen with a glass mat reinforcement. The surface is sanded and the underface is composed of a silicone film easily detachable in two parts.

INTENDED USES:

- Steep exterior slopes
- Asphalt shingles

CODES:

00822 – 36" × 65' (91 cm × 20 m) NB
00844 – 36" × 80' (91 cm × 24.4 m) NB
00911 – 44" × 75' (1.12 m × 22.8 m) NB
00941 – 44" × 61.2' (1.12 m × 18.7 m) NB

BENEFITS

- Anti-slip sanded surface
- Self-sealing around screws and nails
- Resistant to outdoor temperature changes



ICE AND WATER PROTECTOR

LASTOBOND SANDED FINISH

LASTOBOND SANDED FINISH is a 64 mils self-adhesive waterproofing membrane made of elastomeric SBS bitumen with a glass mat reinforcement. The surface is sanded and the underface is composed of a silicone film easily detachable in two parts.

INTENDED USES:

- Steep exterior slopes
- Asphalt shingles

CODES:

00166 – 36" × 33' (91 cm × 10 m)
00167 – 36" × 65' (91 cm × 20 m)
0090302 – 18" × 65' (45.5 cm × 20 m) NB
00151 – 36" × 65' (91 cm × 20 m) NB
00159 – 36" × 80' (91 cm × 24.4 m) NB

BENEFITS

- Anti-slip sanded surface
- Self-sealing around screws and nails
- Resistant to outdoor temperature changes



HIGH TEMPERATURE REINFORCED ROOF UNDERLAYMENT

LASTOBOND SMOOTH SEAL HT

LASTOBOND SMOOTH SEAL HT is a 47 mils self-adhesive waterproofing membrane made of elastomeric SBS bitumen and a glass mat reinforcement. The surface is an anti-slip plastic film and the underface is a silicone film easily detachable in two parts.

INTENDED USES:


- Steep exterior slopes
- Asphalt shingles
- Metal roofing

CODE:

00959 – 36" × 65' (91 cm × 20 m) NB

BENEFITS

- Resistant to high temperatures up to 115 °C (240 °F)
- UV resistant (60-day exposure)
- Great tensile strength
- Self-sealing around screws and nails



HIGH TEMPERATURE REINFORCED ROOF UNDERLAYMENT

LASTOBOND SMOOTH SEAL HT FR

Lastobond Smooth Seal HT FR is a multi-purpose fire resistant self-adhering roofing underlayment used under metal or asphalt shingles. It is designed to withstand temperature variations from -45 °C to 115 °C (-49 °F to 240 °F).

INTENDED USES:


- Steep exterior slopes
- Asphalt shingles
- Metal roofing

CODE:

00960 – 36" × 65' (91 cm × 20 m) NB

BENEFITS

- Fire resistance tested under UL 790
- California Office of the State Fire Marshal (OSFM) approved and listed
- Reinforcement provides added strength/stability
- Anti-Slip and Easy Installation



BASE SHEET

ROOF UNDERLAYMENT

HIGH TEMPERATURE ROOF UNDERLAYMENT LASTOBOND PRO HT-N


LASTOBOND PRO HT-N is a 40 mils self-adhesive waterproofing membrane made of elastomeric SBS bitumen and a trilaminate woven polyethylene surface. The underface is composed of a silicone film easily detachable in two parts. The membrane is ideal under all types of cladding.

INTENDED USES:

- Steep and low exterior slopes
- Asphalt shingles
- Metal roofing
- Single-ply system

CODES:

10107 – 36" × 65' (91 cm × 20 m)
10007 – 36" × 65' (91 cm × 20 m) NB



BENEFITS

- Ideal for under metal roofing
- Anti-slip surface
- Self-sealing around screws and nails
- Resistant to high temperatures up to 90 °C (194 °F)

HIGH TEMPERATURE ROOF UNDERLAYMENT LASTOBOND PRO HT-S

LASTOBOND PRO HT-S is a 40 mils self-adhesive waterproofing membrane made of elastomeric SBS bitumen and a trilaminate woven polyethylene surface. The underface is composed of a silicone film easily detachable in two parts. The membrane is ideal under all types of cladding.

INTENDED USES:

- Steep and low exterior slopes
- Asphalt shingles
- Metal roofing
- Single-ply roof system

CODES:

10108 – 36" × 65' (91 cm × 20 m)
10009 – 36" × 65' (91 cm × 20 m) NB



BENEFITS

- Ideal for under metal roofing
- Anti-slip surface
- Self-sealing around screws and nails
- Resistant to high temperatures up to 126 °C (260 °F)

DECK TAPE

This product is a 43 mils (1.1 mm) self-adhesive tape composed of elastomeric bitumen and trilaminate woven polyethylene. The underface is composed of a silicone release paper. It provides an air and vapor seal to the roof deck seams and other construction details.

INTENDED USES:

- Seal roofing deck seams
- Steep and low exterior slopes
- Asphalt shingles
- Metal roofing

CODES:

1005506 – 6" × 65' (15 cm × 20 m)
1005509 – 4" × 65' (10 cm × 20 m)

BENEFITS

- Excellent resistance to temperature variations
- Easy Installation
- UV resistant; 90-day exposure



HIGH TEMPERATURE TILE ROOFING UNDERLAYMENT LASTOBOND TU HT

The LASTOBOND TU HT roof underlayment is a 67 mils high-temperature SBS modified bitumen membrane that can be exposed to temperatures up to 257 °F (125 °C). The self-adhesive underface is covered with a silicone split-back release film. The top face is composed of non-woven polyester, perfect for tile, slate and metal roofing applications.

INTENDED USES:

- Outside steep slopes
- Slate tiles
- Metal roofing
- Asphalt shingles

CODES:

00300 – 39" × 65' (1 m × 20 m)
00306 – 39" × 65' (1 m × 20 m) BOX



BENEFITS

- Clean and easy installation
- Resistant to weather fluctuations
- 180-day exposure

SELF-ADHERED WATERPROOFING MEMBRANE BASIC WATERPROOFING MEMBRANE

The BASIC WATERPROOFING MEMBRANE is a 60 mils self-adhesive membrane made of elastomeric SBS bitumen and trilaminate woven polyethylene. The underface is composed of a silicone film easily detachable. This membrane is mainly used as a base sheet in two-ply roofing systems as well as for the waterproofing of foundations, shower bases, and washrooms.

INTENDED USES:

- Two-ply roofing systems
- Foundations
- Showers and washrooms

CODES:

6524201 – 20" × 23' (50 cm × 7 m)
65241 – 39" × 33' (1 m × 10 m)
15256 – 39" × 61' (1 m × 18.6 m)
15250 – 39" × 61' (1 m × 18.6 m) LT NB



BENEFITS

- Great tear resistance
- Self-sealing
- Low-temperature grade also available

SHINGLE UNDERLAYMENT RESISTOFLEX


RESISTOFLEX is a 55 mils roofing underlayment membrane made of elastomeric SBS bitumen and a glass mat reinforcement. The surface and the underface are sanded. This membrane is used as an additional waterproofing component under the roofing.

INTENDED USES:

- Steep exterior slopes
- Asphalt shingles

CODES:

00943 – 36" × 33' (91 cm × 10 m)
00931 – 44" × 65' (1.12 m × 20 m)



BENEFITS

- Anti-slip sanded surface
- Self-sealing around screws and nails
- Resistant to outdoor temperature changes

SYNTHETIC ROOFING UNDERLAYMENT RESISTOR

RESISTOR is a synthetic roofing underlayment membrane. The surface of the membrane is made of anti-slip, embossed non-woven polyolefin. As for the underface, it is reinforced with woven polymer. It can be used as a complement to the installation of an eave protector.

INTENDED USES:

- Steep exterior slopes
- Asphalt shingles
- Metal roofing

CODE:
21758 – 42" × 286' (1.07 m × 87 m)



BENEFITS

- Larger coverage per roll
- Wrinkle free and flexible at low temperature for easy installation
- A nailing pattern is printed on the surface for easy installation

SYNTHETIC ROOFING UNDERLAYMENT RESISTOR SF

RESISTOR SF is a lightweight, non-slip synthetic membrane composed of a non-woven polyolefin surface and a polymer reinforced woven polyolefin underside. It can be used as a complement to the installation of an eave protector.

INTENDED USES:

- Steep exterior slopes
- Asphalt shingles
- Metal roofing

CODE:
22353 – 42" × 286' (1.07 m × 87 m)



BENEFITS

- Anti-slip
- Much lighter and stronger than felt paper
- Tensile strength and tear resistance

MULTIPURPOSE WATERPROOFING MEMBRANE WHITE LACQUERED FINISH

The MULTIPURPOSE WATERPROOFING MEMBRANE is a 40 mils self-adhesive membrane composed of SBS modified bitumen. This membrane is perfect to waterproof various repair and maintenance works around the house, cottage, or farm.

INTENDED USES:

- Multipurpose

CODES:
66524 – 4" × 16' (10 cm × 5 m)
66526 – 6" × 16' (15 cm × 5 m)
66529 – 9" × 16' (23 cm × 5 m)
66522 – 12" × 16' (30 cm × 5 m)
66528 – 18" × 16' (46 cm × 5 m)
66520 – 36" × 16' (91 cm × 5 m)



BENEFITS

- Low temperature flexibility
- Resistant to outdoor temperature changes

MULTIPURPOSE WATERPROOFING MEMBRANE ALUMINUM FINISH

The MULTIPURPOSE WATERPROOFING MEMBRANE is a 1 mm self-adhesive membrane composed of SBS modified bitumen. This membrane is perfect to waterproof various repair and maintenance works around the house, cottage, or farm.

INTENDED USES:

- Multipurpose

CODES:
66574 – 4" × 16' (10 cm × 5 m)
66576 – 6" × 16' (15 cm × 5 m)
66579 – 9" × 16' (23 cm × 5 m)
66572 – 12" × 16' (30 cm × 5 m)
66578 – 18" × 16' (46 cm × 5 m)
66570 – 36" × 16' (91 cm × 5 m)



BENEFITS

- Low temperature flexibility
- Resistant to outdoor temperature changes

REPAIR AND SEAL TAPE

REPAIR AND SEAL TAPE is a versatile, self adhesive 60 mil membrane, consisting of a rubberized asphalt compound, covered by a patented Aluminum Foil reinforced with a polyester film. The adhesive compound is protected, until use, by a silicone release film.

INTENDED USES:

- Multipurpose

CODE:
66876 – 6" × 25' (15 cm × 7.6 m)



BENEFITS

- Waterproof and Self-sealing
- UV resistant
- Cold applied without use of flames

SOPRAVAP'R VAPOR BARRIER MEMBRANE

Self-adhesive vapour barrier membrane composed of a tri-laminated woven polyethylene facer and SBS modified bitumen. The underface is covered with a silicone release film.

INTENDED USES:

- Low exterior slopes
- Very low exterior slopes
- Interior slopes

CODE:
14201 – 45" × 133.9' (1.14 m × 40.8 m)



BENEFITS

- Fast and easy-to-install
- Support panel not required
- The width of the membrane (1.14 m [45 in]) was determined so that it fits with the top of most steel deck profiles. Wastage is then reduced and, at the same time, the area covered by a roll is increased.

SELF-ADHESIVE GRANULATED CAP SHEET MEMBRANE SA CAP GR

SELF-ADHESIVE GRANULATED CAP SHEET MEMBRANE is a self-adhesive cap sheet membrane composed of SBS modified bitumen with a composite reinforcement. The surface is protected by granules, while the underface is covered with a split-back release film.

INTENDED USES:

- Low slopes
- Very low slopes

CODES:

08277 - 39" x 33' (1 m x 10 m) TERRACOTA
08271 - 39" x 33' (1 m x 10 m) GRAY
08276 - 39" x 33' (1 m x 10 m) TAN
08275 - 39" x 33' (1 m x 10 m) WEATHERWOOD
08270 - 39" x 33' (1 m x 10 m) BROWN
08273 - 39" x 33' (1 m x 10 m) GREEN
08274 - 39" x 33' (1 m x 10 m) WHITE
08272 - 39" x 33' (1 m x 10 m) BLACK

BENEFITS

- High tensile strength composite reinforcement
- Clean, fast and easy installation



SELF-ADHESIVE GRANULATED CAP SHEET MEMBRANE SA CAP FR GR

SELF-ADHESIVE CAP SHEET MEMBRANE composed of SBS modified bitumen with a composite reinforcement. The surface is protected by granules, while the underface is covered with a split-back release film.

INTENDED USES:

- Low slopes
- Very low slopes

CODES:

09222 - 39" x 33' (1 m x 10 m) BLACK
09224 - 39" x 33' (1 m x 10 m) WHITE
09226 - 39" x 33' (1 m x 10 m) TAN
09220 - 39" x 33' (1 m x 10 m) BROWN
09227 - 39" x 33' (1 m x 10 m) TERRACOTA
09223 - 39" x 33' (1 m x 10 m) GREEN
09225 - 39" x 33' (1 m x 10 m) WEATHERWOOD
09221 - 39" x 33' (1 m x 10 m) GRAY

BENEFITS

- When directly adhered on plywood and used with SA BASE, it offers a unique self-adhesive system that is classified UL 790 Class A
- High tensile strength composite reinforcement
- Clean, fast and easy installation



SELF-ADHESIVE BASE SHEET MEMBRANE SA BASE

SA BASE is a 88 mils-thick self-adhesive base sheet membrane composed of SBS modified bitumen with a fiberglass mat reinforcement. The surface is sanded, while the underface is covered with a silicone split-back release film.

INTENDED USES:

- Low slopes
- Very low slopes

CODE:

07022 - 39" x 49' (1 m x 15 m)

BENEFITS

- When directly adhered on plywood and used in combination with SA CAP GR, it offers a unique self-adhesive system that is UL 790 Class A classified.
- Clean, fast and easy installation
- Remains flexible at low temperatures



SELF-ADHESIVE BASE PLY MEMBRANE SA SMOOTH PLY 40

SELF-ADHESIVE BASE PLY MEMBRANE - SA SMOOTH PLY 40 is a 40 mils-thick self-adhesive base ply membrane composed of SBS modified bitumen. The surface is a UV resistant trilaminate woven polyethylene, while the self-adhesive underface is covered with a silicone split-back release film.

INTENDED USES:


- Low slopes
- Very low slopes

CODE:

10167 - 39" x 65' (1 m x 20 m)

BENEFITS

- Non-slip surface
- Flexible, self-sealing membrane
- Withstands fluctuations in outdoor temperatures
- Up to 90 days UV exposure



SA NAILBASE

This 80 mils-thick base sheet is composed of SBS modified bitumen and a fiberglass mat reinforcement. The anti-slip surface is made of customized polypropylene, which maximizes the adhesion of the base sheet membrane in a two or three-ply system and the cap sheet in single-ply system. Featuring exceptional durability and resistance, the RESISTO SA NAILBASE is made to not only meet, but exceed both industry and code requirements.

INTENDED USES:

- Low slopes

CODE:

06022 - 39" × 65' (1 m × 20 m)

BENEFITS

- The only nailed base sheet on the market with self-adhered side laps.
- Stronger than competitors nailed base membranes, the RESISTO SA NAILBASE secures your system in place, even in high wind areas.
- SBS modified bitumen formula allows for easy installation, even in hot temperatures.



SEMI-RIGID ASPHALTIC BOARD RESISTOBOARD

RESISTOBOARD is a semi-rigid panel composed of an asphaltic core reinforced with mineral materials between two layers of asphalt saturated fiberglass. This panel acts as a membrane support material on low slope roofs. It can be installed on wood surfaces or on an existing roof when reroofing.

INTENDED USES:

- Low slopes

CODES:

08421 - 4' × 5' (1.22 m × 1.52 m) × 1/4"
08420 - 4' × 5' (1.22 m × 1.52 m) × 1/8"
08424 - 4' × 8' (1.22 m × 1.52 m) × 1/8"
08426 - 4' × 8' (1.22 m × 1.52 m) × 1/4"

BENEFITS

- Compatible with most modified bitumen and multilayer waterproofing systems
- Easy to handle and install
- Mould resistant



SELECT TORCH

THE RESISTO SELECT TORCH base ply / inner ply is composed of SBS modified bitumen applied onto a glass mat reinforcement. The SBS sheet is manufactured with a film applied to both the topside and underside surfaces for heat-welded applications only.

INTENDED USES:

- Negative slopes with internal drain
- Outside low slopes

CODE:

08103 - 39" × 33' (1 m × 10 m)

BENEFITS

- Clean, fast and easy installation
- High tensile strength reinforcement
- Remains flexible at low temperatures



SELECT TORCH 180

The RESISTO SELECT TORCH 180 base ply / inner ply membrane is composed of SBS modified bitumen applied onto a non-woven polyester reinforcement. The SBS sheet is manufactured with a film applied to both the topside and underside surfaces for heat-welded applications only.

INTENDED USES:

- Negative slopes with internal drain
- Outside low slopes

CODE:

08100 - 39" × 33' (1 m × 10 m)

BENEFITS

- Clean, fast and easy installation
- High tensile strength reinforcement
- Remains flexible at low temperatures



SELECT TORCH 180 GR

Cap sheet composed of SBS modified bitumen applied onto a non-woven polyester reinforcement with a granulated topside and an underside with a thermofusible plastic film.

INTENDED USES:

- Negative slopes with internal drain
- Outside low slopes

CODE:

08101 - 39" × 33' (1 m × 10 m)

BENEFITS

- Clean, fast and easy installation
- High tensile strength reinforcement
- Remains flexible at low temperatures



SELECT GR MOP/COLD

The RESISTO SELECT GR MOP/COLD cap ply is composed of SBS modified bitumen applied onto a glass mat reinforcement. The SBS sheet is manufactured with a granulated topside and a sanded underside for adhered applications.

INTENDED USES:

- Negative slopes with internal drain
- Outside low slopes

CODE:

08104 - 39" × 33' (1 m × 10 m) WHITE
08110 - 39" × 33' (1 m × 10 m) BLACK

* SELECT 180 GR MOP/COLD also available
08105 - 39" × 33' (1 m × 10 m)

BENEFITS

- Clean, fast and easy installation
- High tensile strength reinforcement
- Remains flexible at low temperatures



SELECT 180 MOP/COLD

The RESISTO SELECT 180 MOP/COLD base ply/inner ply is composed of selected SBS modified bitumen applied onto a non-woven polyester reinforcement.

The SBS sheet is manufactured with a sanded underside and topside surfaces.

INTENDED USES:

- Negative slopes with internal drain
- Outside low slopes

CODE:

08102 – 39" × 49' (1 m × 15 m)

BENEFITS

- Excellent resistance to temperature variations
- Excellent dimensional stability
- Anti-slip



BITUTAK MB MINERAL

BITUTAK MB MINERAL is a 161 mils (4.1 mm) heat-welded cap sheet membrane composed of a blend of APP (atactic polypropylene) polymers, select asphalts and a non-woven polyester reinforcement with a granulated surface. Membrane is film-backed for ease of heat-welding installation.

CODE:

22905 – 39" × 33' (1 m × 10 m) BLACK

22904 – 39" × 33' (1 m × 10 m) WHITE

BENEFITS

- Weathering capabilities and UV resistance
- Heat resistant non-woven polyester mat which provides the strength and durability necessary in a roofing membrane
- Available in standard black or white mineral surface
- Membranes are film-backed for ease of heat-welding installation



BITUTAK MB SMOOTH

CODE:

22903 – 39" × 33' (1 m × 10 m)

BITUTAK MB SMOOTH is a 150 mils (3.8 mm) heat-welded cap sheet membrane composed of a blend of APP (atactic polypropylene) polymers, select asphalts and a non-woven polyester reinforcement with a sanded surface. Membrane is film-backed for ease of heat-welding installation.

BENEFITS

- Weathering capabilities and UV resistance
- Heat resistant non-woven polyester mat which provides the strength and durability necessary in a roofing membrane
- Adapts well to the use of aluminum or other fine coatings
- Membranes are film-backed for ease of heat-welding installation





TO
TS
IS
E
P

WATERPROOFING

RESIST



WATERPROOFING

ICF FOUNDATIONS MEMBRANE

The ICF FOUNDATIONS MEMBRANE is a self-adhesive membrane dedicated to the waterproofing of insulated concrete form (ICF) foundations. It is composed of 40 mils thick SBS-modified bitumen and a trilaminate woven polyethylene. The underface is composed of a silicone film easily detachable.

CODES:

10046 – 36" × 67" (91 cm × 20.4 m)
10045 – 36" × 67" (91 cm × 20.4 m) NB
10049 – 36" × 67" (91 cm × 20.4 m) LT
10044 – 36" × 67" (91 cm × 20.4 m) LT NB

BENEFITS

- Self-adhesive formulation specially adapted for ICFs
- No primer required on polystyrene surfaces
- Low-temperature grade also offered



SELF-ADHERED WATERPROOFING MEMBRANE

BASIC WATERPROOFING MEMBRANE

The BASIC WATERPROOFING MEMBRANE is a 1.5 mm self-adhesive membrane made of elastomeric SBS bitumen and trilaminate woven polyethylene. The underface is composed of a silicone film easily detachable. This membrane is mainly used as a base sheet in two-ply roofing systems as well as for the waterproofing of foundations, shower bases, and washrooms.

INTENDED USES:

- Two-ply roofing systems
- Foundations
- Showers and washrooms

CODES:

6524201 – 20" × 23' (50 cm × 7 m)
65241 – 39" × 33' (1 m × 10 m)
15256 – 39" × 61' (1 m × 18.6 m)

BENEFITS

- Great tear resistance
- Self-sealing
- Low-temperature grade also offered



BELOW-GRADE DRAINAGE BOARD

The below-grade drainage board is a dimpled high-density polyethylene (HDPE) membrane that keeps foundations and flooring dry. It creates a waterproof vapour barrier and an air space, which allows concrete to breathe while controlling moisture. Our drain board is made from 70% recycled plastic.

CODES:

57106 – 8' × 65.6' (2.44 m × 20 m)
57107 – 8'(DT) × 65.6' (2.44 m × 20 m)
57105 – 7.3' × 65.6' (2.21 m × 20 m)
57104 – 6.79' × 65.6' (2.07 m × 20 m)
57103 – 6.5' × 65.6' (1.98 m × 20 m)
57102 – 6' × 65.6' (1.83 m × 20 m)
57101 – 5.5' × 65.6' (1.65 m × 20 m)
57100 – 3.71' × 50' (1.13 m × 15.2 m)
24685 – Box of «speedclips» 325 units
24681 – Bag of «speedclips» 65/bag
24683 – Washers 65 units/bag
24682 – Moulding - 10 units
24684 – Plugs 250 units/bag

BENEFITS

- Made of strong, durable HDPE
- Solves problems related to leaks in basements
- Economical



RESISTO

WALL SYSTEMS



WALL SYSTEMS

AIR AND VAPOR BARRIER MEMBRANE REDZONE PRO

REDZONE PRO is a 40 mils self-adhesive through-wall membrane designed for commercial and residential buildings. It ensures air and water vapor sealing. REDZONE PRO is composed of elastomeric SBS bitumen and a trilaminated woven polyethylene facer. The trilaminated woven polyethylene is compatible with the use of sprayed polyurethane foam insulation.

CODES:
1730009 – 4" × 75' (10 cm × 22.9 m)
1730006 – 6" × 75' (15 cm × 22.9 m)
1730004 – 9" × 75' (23 cm × 22.9 m)
1730003 – 12" × 75' (30 cm × 22.9 m)
1730002 – 18" × 75' (45 cm × 22.9 m)
14005 – 36" × 75' (91 cm × 22.9 m)

BENEFITS

- Self-adhesive: quick, cost-effective and easy installation
- Meets door and window installation standards (CSA A440.4-07)
- Self-sealing around screws and nails



AIR BARRIER AND VAPOR-PERMEABLE MEMBRANE SOPRASEAL STICK VP

Self-adhesive vapour permeable and air barrier membrane with a tri-laminated polypropylene facer used on walls. It can also be used as a through-wall flashing membrane and transition membrane. The self-adhesive underface is covered with a silicone release film.

CODES:
21501 – 0.95 m × 30 m (37" × 98")
21503 – 0.15 m × 30 m (6" × 98")
21504 – 0.23 m × 30 m (9" × 98")
21505 – 0.30 m × 30 m (12" × 98")

BENEFITS

- No primer required
- Better adhesive properties than competitive products
- UV exposure up to 180 days



AIR BARRIER AND VAPOR-PERMEABLE MEMBRANE RESISTO VP SA

RESISTO VP SA is a self-adhesive vapor-permeable air barrier membrane composed of a polypropylene trilaminar complex surface. It is used in wall construction and stands out thanks to its unmatched adhesive qualities without primer.

CODE:
24795 – 47" × 98' (1.2 m × 30 m)

BENEFITS

- Better adhesive properties than products from the competition (without primer)
- Up to 180-day UV exposure
- Self-sealing membrane ensuring continuous waterproofing



AIR AND VAPOR BARRIER MEMBRANE REDZONE 25

REDZONE 25 AIR AND VAPOR BARRIER MEMBRANE is a 25 mils self-adhesive membrane composed of elastomeric SBS bitumen and trilaminated woven polyethylene. The underface is composed of a silicone film easily detachable. It seals air and vapour around door and window frames.

CODES:
17753 – 4" × 75' (10 cm × 22.9 m)
17754 – 6" × 75' (15 cm × 22.9 m)
17755 – 9" × 75' (23 cm × 22.9 m)
17756 – 12" × 75' (30 cm × 22.9 m)
17757 – 18" × 75' (46 cm × 22.9 m)
17752 – 36" × 75' (91 cm × 22.9 m)

BENEFITS

- Provides continuous air and vapour barrier
- Meets door and window installation standards (CSA A440.4-07)
- Self-sealing around screws and nails



ALL-WEATHER BUTYL FLASHING TAPE

RESISTO ALL-WEATHER BUTYL FLASHING TAPE is a self-adhesive membrane made of rubberized butyl that blocks air and water infiltration. It is easy to apply to wood, aluminum, polyethylene and PVC surfaces, as well as on air barrier membranes and exterior fibreglass gypsum.

CODES:
 22767 – 4" × 75' (10 cm × 22.9 m)
 22858 – 6" × 75' (15 cm × 22.9 m)
 22860 – 9" × 75' (23 cm × 22.9 m)
 22859 – 12" × 75' (30 cm × 22.9 m)

BENEFITS

- Superior adhesion at temperatures ranging from -15 to 65 °C (5 to 149 °F) without primer
- Excellent adhesion to most common construction materials, including PVC
- UV resistant for 180 days



FLASHING TAPE

Self-adhesive bitumen membrane that eliminates drafts and water leaks by ensuring the continuity of air barrier and waterproofing systems around doors and windows. FLASHING TAPE must be covered by a finishing material.

CODES:
 1005402 – 18" × 100' (46 cm × 30.5 m)
 1005403 – 12" × 100' (30 cm × 30.5 m)
 1005404 – 9" × 100' (23 cm × 30.5 m)
 1005406 – 6" × 100' (15 cm × 30.5 m)
 1005409 – 4" × 100' (10 cm × 30.5 m)

BENEFITS

- Provides a continuous air/water barrier
- Resists strong winds and gusts
- Eliminates drafts and water leaks



REDZONE CORNER GUARD

REDZONE CORNER GUARD is designed to cover and protect the junction between the sill and the jamb, one of the most critical areas.

CODE:
 29396 – 2.5" × 7.25" (6.5 cm × 18.5 cm)
 Box of 100 units

BENEFITS

- Saves time
- Helps reduce costly mistakes caused by intricate cutting, bending, sealing, and caulking



ACCESSORIES

EXTERIOR PRIMER

The EXTERIOR PRIMER is a synthetic polymer-based cold-process compound made of natural resins and solvent. It is used to prime and prepare exterior surfaces, such as concrete, metal, wood and plywood to enhance the adherence of RESISTO elastomeric SBS bitumen self-adhesive membranes.

CODES:
65756 – 12.3 oz (350 ml)
65751 – 31 oz (910 ml)
65755 – 1 gal (3.78 L)
35760 – 2.6 gal (10 L)
65745 – 5 gal (18.9 L)

BENEFITS

- Resistant to water, alcohol and most saline, alkaline and dilute acid solutions
- Primes and prepares several types of surfaces
- Fast curing



EXTERIOR LOW V.O.C. PRIMER

The EXTERIOR LOW V.O.C. PRIMER is a synthetic polymer-based cold-process compound made of natural resins and solvent. It is used to prime and prepare exterior surfaces, such as concrete, metal, wood and plywood to enhance the adherence of RESISTO elastomeric SBS bitumen self-adhesive membranes. It has a very low VOC content and meets LEED requirements (IEQ Credit 4.1).

CODES:
30115 – 12.3 oz (350 ml)
37703 – 1 gal (3.78 L)
37702 – 5 gal (18.9 L)

BENEFITS

- Resistant to water, alcohol and most saline, alkaline and dilute acid solutions
- Primes and prepares several types of surfaces
- Fast curing



H2O PRIMER

H2O PRIMER is a polymer emulsion-based primer designed to improve the adhesion of RESISTO self-adhesive elastomer SBS modified bitumen waterproofing membranes on most substrates. It is particularly recommended when the use of solvent-based primer is not advised (indoor installation and on polystyrene insulation).

CODES:
30116 – 31 oz (910 ml)
30112 – 1 gal (3.78 L)
30111 – 5 gal (18.9 L)

BENEFITS

- Solvent free
- Compatible with polystyrene insulation



ALUMINUM ROOF COATING

The ALUMINUM ROOF COATING is a thick, homogeneous coating made of elastomeric bitumen, volatile solvents, and reflective aluminum pigments. It restores and protects metal surfaces from corrosion: roofs, cladding, storage tanks, water ducts, etc. This product can also be used to revitalize aging traditional asphalt roofs.

INTENDED USES:

- Multilayer asphalt roofing
- Steel roofing

CODES:
34005 – 0.8 gal (3 L)
34015 – 4.8 gal (18 L)

BENEFITS

- Allows to reduce surface temperature by protecting it from UV rays
- Restores and protects metal surfaces
- Can be applied on different surfaces, such as asphalt roofing



ELASTOCOL STICK

ELASTOCOL STICK is a primer designed to enhance the adhesion of self-adhesive membranes on various surfaces. It is composed of SBS synthetic rubbers, adhesive-enhancing resins and volatile solvents. It is also suitable to prime non-porous surfaces, such as concrete, fiber cement, metal, and wood.

CODE:
37746 – 5 gal (18.9 L)



BENEFITS

- Cold application
- Single component (ready to use)

JOIST GUARD

Waterproof protection for joists that prevents deterioration of structural timber under exterior floors, such as patios and balconies. The joist guard is a 25 mils self-adhesive waterproofing membrane made of elastomeric SBS bitumen and a polyethylene film on the surface. The underface is composed of a silicone film easily detachable.

CODE:
10099 – 4" × 75' (10 cm × 22.9 m)

BENEFITS

- Substantially extends the service life of patios at low cost
- Barely visible between the boards
- Self-sealing around screws and nails



ELASTOMERIC SEALANT

ELASTOMERIC SEALER is a mastic containing elastomeric bitumen, volatile solvents, asbestos-free fibres, and mineral fillers to use with RESISTO waterproofing membranes and strips. Can also be used as a caulking mastic and for filling joints and cracks.

CODES:
65650 – 10.5 oz (310 ml)
65655 – 8.8 lb (4 kg)
65653 – 26.5 lb (12 kg)



BENEFITS

- Can be applied on wet surfaces
- Adheres to a variety of materials
- Resistant to temperature changes

ALUMINUM ELASTOMERIC SEALANT

The ALUMINUM ELASTOMERIC SEALANT is a mastic containing elastomeric bitumen, volatile solvents, asbestos-free fibres and mineral fillers. It contains aluminum pigmentation distributed through the entire product for superior UV protection. It is used as a caulking mastic and for filling cracks. It is compatible with bitumen-based products and adheres to a variety of materials without primer.

CODE:
65700 – 10 oz (310 ml)



BENEFITS

- May be applied to damp surfaces
- Adheres to a wide variety of materials
- Withstands temperature variations
- Excellent UV resistance

LIQUID WATERPROOFING MEMBRANE ALSAN FLASHING

Patented single-component, polyurethane and bitumen-based waterproofing coating used to waterproof hard-to-access upstands and other details where it is difficult to apply sheet waterproofing membranes.

CODES:
32800 – 19 L (5 gal)
32825 – 3.78 L (1 gal)




BENEFITS

- Superior protection against moisture
- Easy to apply
- Fire hazards are eliminated because no torch is used

FLASHING REINFORCEMENT

Polyester reinforcement used for waterproofing continuity at transition details.

CODE:
32833 – 13.5 ft² (1.25m²)



BENEFITS

- Good resistance to tear and abrasion
- Resistance to moisture and mildew
- Lightweight material



TO
T
S
C
E
R

INSULATION



INSULATION

REFLECTIVE INSULATION

M2V

M2V is an 5/16 inch thick reflective insulation consisting of two layers of air bubbles laminated between a metallized polyethylene sheet and a white polyethylene sheet.

INTENDED USES:

- Walls and ceilings
- Water lines and ventilation ducts
- Concrete slabs
- Radiant water heating systems
- Crawl spaces
- Metal frame buildings
- Concrete block walls
- Garage doors
- Water heaters

BENEFITS

- Installs quickly and easily
- Reduces condensation, air infiltration, and energy costs
- Provides an excellent R-value



M2M

M2M is an 5/16 inch thick reflective insulation consisting of two layers of air bubbles laminated between two metallized polyethylene sheets.

INTENDED USES:

- Walls and ceilings
- Water lines and ventilation ducts
- Radiant water heating systems
- Crawl spaces
- Metal frame buildings
- Concrete block walls
- Garage doors
- Water heaters

BENEFITS

- Installs quickly and easily
- Reduces condensation, air infiltration, and energy costs
- Provides an excellent R-value



M1V

M1V is a 3/16 inch thick reflective insulation consisting of a layer of air bubbles laminated between a metallized polyethylene sheet and a white polyethylene sheet.

INTENDED USES:

- Walls and ceilings
- Water lines and ventilation ducts
- Crawl spaces
- Metal frame buildings
- Concrete block walls
- Garage doors
- Water heaters

BENEFITS

- Installs quickly and easily
- Reduces condensation, air infiltration, and energy costs
- Provides an excellent R-value



CM2P

CM2P is an 5/16 inch thick reflective insulation consisting of two layers of air bubbles laminated between a metallized polyethylene and a clear polyethylene sheet. The metallized surface is covered with a clear coating that protects the insulation against oxidation in applications under concrete slabs.

INTENDED USES:

- Concrete slabs
- Concrete slabs with integrated radiant heating system

BENEFITS

- Installs quickly and easily
- Reduces condensation, air infiltration, and energy costs
- Provides an excellent R-value



ALUMINUM ADHESIVE TAPE

The ALUMINUM ADHESIVE TAPE is composed of a self-adhesive aluminum film and a silicone release film. It is designed to seal the joints of metallic surfaces.

CODES:
20711 – 2" × 30' (5 cm × 9.1 m)
20712 – 2" × 150' (5 cm × 45.7 m)
20772 – 3" × 150' (7.6 cm × 45.7 m)



WATER HEATER INSULATION KIT

CODES:
55046 – 60 gal
55047 – 40 gal

60 GALLONS #55046
40 GALLONS #55047

PRODUCT CODES

REFLECTIVE INSULATION*

M1V

55210 – 72" × 125' (750 ft²)
55225 – 48" × 125' (500 ft²)

CM2P

55145 – 48" × 125' (500 ft²)

M2M

55238 – 72" × 125' (750 ft²)	55258 – 16" × 125' (167 ft²)
55204 – 48" × 125' (500 ft²)	55000 – 48" × 25' (100 ft²)
55224 – 48" × 100' (400 ft²)	55002 – 24" × 25' (50 ft²)
55267 – 60" × 125' (625 ft²)	55005 – 16" × 25' (33 ft²)
55287 – 24" × 125' (250 ft²)	55014 – 2" × 25' (4.17 ft²)

M2V

55045 – 96" × 62.5' (500 ft²)
55216 – 72" × 125' (750 ft²)
55211 – 48" × 125' (500 ft²)

*Additional sizes available upon request



KUNY'S
SP-90

STANLEY



INSULATION

INSULATION

■ EXTRUDED POLYSTYRENE

SOPRA-XPS 20

SOPRA-XPS 20 is a rigid thermal insulation board made of extruded polystyrene composed of closed cell foam. SOPRA-XPS 20 is mainly used as thermal insulation for above grade SOPREMA wall systems and on the inside of foundation walls. It can also be used for residential applications on exterior foundation walls and under concrete slabs. Compliant with ASTM C578.

INTENDED USES:

- Walls



BENEFITS

- Exceptional resistance to water and humidity
- Durable and strong
- Superior initial and long-term thermal performance (R-5/in)

SOPRA-XPS 40

SOPRA-XPS 40 is a rigid thermal insulation board made of high-density extruded polystyrene with squared edges on its four sides. It is composed of closed cell foam. SOPRA-XPS 40 is designed for applications requiring high-density insulation on which heavy loads will be applied. It is mainly used for SOPREMA foundation systems under slabs, protected-membrane roofing systems (inverted), parking decks, and plaza decks. Compliant with ASTM C578.

INTENDED USES:

- Foundation systems
- Inverted roofing
- Civil engineering



BENEFITS

- Exceptional resistance to water and humidity
- Durable and strong
- Superior initial and long-term thermal performance (R-5/in)

SOPRA-XPS 30

SOPRA-XPS 30 is a rigid thermal insulation board made of extruded polystyrene with shiplap or square edges on its four sides. It is composed of closed cell foam. It is mainly used as a thermal insulation for SOPREMA foundation wall systems and under concrete slabs where the applied loads do not exceed 30 psi. Compliant with ASTM C578.

INTENDED USES:

- Foundation walls, under concrete slabs



BENEFITS

- Exceptional resistance to water and humidity
- Durable and strong
- Superior initial and long-term thermal performance (R-5/in)

SOPRA-XPS 60

SOPRA-XPS 60 is a rigid thermal insulation board made of high-density extruded polystyrene with squared edges on its four sides. It is composed of closed cell foam. SOPRA-XPS 60 is designed for applications requiring high-density insulation on which heavy loads will be applied. It is mainly used for SOPREMA foundation systems under slabs, protected-membrane roofing systems (inverted), parking decks, and plaza decks. Compliant with ASTM C578.

INTENDED USES:

- Foundation systems
- Inverted roofing
- Civil engineering



BENEFITS

- Exceptional resistance to water and humidity
- Durable and strong
- Superior initial and long-term thermal performance (R-5/in)

PRODUCT CODES

EXTRUDED POLYSTYRENE

SOPRA-XPS 20

44322R – SOPRA-XPS 20 with shiplap edges (length) – 8' × 4' × 1"
44323R – SOPRA-XPS 20 with shiplap edges (length) – 8' × 4' × 1.5"
44324R – SOPRA-XPS 20 with shiplap edges (length) – 8' × 4' × 2"
44325R – SOPRA-XPS 20 with shiplap edges (length) – 8' × 4' × 3"
44326R – SOPRA-XPS 20 with shiplap edges (length) – 8' × 4' × 4"
44327R – SOPRA-XPS 20 with shiplap edges (length) – 9' × 4' × 1"
44328R – SOPRA-XPS 20 with shiplap edges (length) – 9' × 4' × 1.5"
44431R – SOPRA-XPS 20 with slotted edges (length) – 8' × 2' × 2"
44365R – SOPRA-XPS 20 with shiplap edges (length) – 9' × 4' × 2"
44366R – SOPRA-XPS 20 with shiplap edges – 8' × 2' × 1"
44367R – SOPRA-XPS 20 with shiplap edges – 8' × 2' × 1.5"
44368R – SOPRA-XPS 20 with shiplap edges – 8' × 2' × 3"
44414R – SOPRA-XPS 20 with straight edges – 8' × 2' × 2"
44415R – SOPRA-XPS 20 with shiplap edges – 8' × 4' × 1"
44416R – SOPRA-XPS 20 with shiplap edges – 8' × 4' × 1.5"
44417R – SOPRA-XPS 20 with shiplap edges – 8' × 4' × 2"
44418R – SOPRA-XPS 20 with straight edges – 8' × 2' × 1"
44419R – SOPRA-XPS 20 with straight edges – 8' × 2' × 1.5"
44420R – SOPRA-XPS 20 with straight edges – 8' × 2' × 3"
44429R – SOPRA-XPS 20 with shiplap edges – 8' × 2' × 2"
44430R – SOPRA-XPS 20 with slotted edges (length) – 8' × 2' × 1.5"
23268R – SOPRA-XPS 20 with straight edges – 8' × 2' × 4"
23267R – SOPRA-XPS 20 with shiplap edges – 8' × 2' × 2.4"
23269R – SOPRA-XPS 20 with shiplap edges – 8' × 2' × 4"
44552R – SOPRA-XPS 20 with straight edges – 8' × 4' × 2"
44431R – SOPRA-XPS 20 with slotted edges (length) – 8' × 2' × 2"

SOPRA-XPS 30

44372R – SOPRA-XPS 30 with shiplap edges – 8' × 2' × 1"
44373R – SOPRA-XPS 30 with shiplap edges – 8' × 2' × 4"
44374R – SOPRA-XPS 30 with straight edges – 8' × 2' × 1.5"
44434R – SOPRA-XPS 30 with shiplap edges – 8' × 2' × 2.5"
44435R – SOPRA-XPS 30 with straight edges – 8' × 2' × 1"
44436R – SOPRA-XPS 30 with straight edges – 8' × 2' × 4"
45000R – SOPRA-XPS 30 with shiplap edges – 8' × 2' × 1.5"
45001R – SOPRA-XPS 30 with shiplap edges – 8' × 2' × 2"
45002R – SOPRA-XPS 30 with shiplap edges – 8' × 2' × 3"
45003R – SOPRA-XPS 30 with straight edges – 8' × 2' × 2"
45004R – SOPRA-XPS 30 with straight edges – 8' × 2' × 3"

SOPRA-XPS 40

44483R – SOPRA-XPS 40 with straight edges – 8' × 2' × 1"
44484R – SOPRA-XPS 40 with straight edges – 8' × 2' × 1.5"
44485R – SOPRA-XPS 40 with straight edges – 8' × 2' × 2.5"
44486R – SOPRA-XPS 40 with straight edges – 8' × 2' × 3.5"
45009R – SOPRA-XPS 40 with straight edges – 8' × 2' × 2"
45010R – SOPRA-XPS 40 with straight edges – 8' × 2' × 3"
45013R – SOPRA-XPS 40 with straight edges – 8' × 4' × 1"
44426R – SOPRA-XPS 40 with shiplap edges – 8' × 2' × 3"
23293R – SOPRA-XPS 40 with shiplap edges – 8' × 2' × 4"
44553R – SOPRA-XPS 40 with shiplap edges – 8' × 4' × 4"

SOPRA-XPS 60

44360R – SOPRA-XPS 60 with straight edges – 8' × 2' × 2.5"
44361R – SOPRA-XPS 60 with straight edges – 8' × 2' × 3.5"
44438R – SOPRA-XPS 60 with straight edges – 8' × 2' × 1"
44439R – SOPRA-XPS 60 with straight edges – 8' × 2' × 1.5"
45011R – SOPRA-XPS 60 with straight edges – 8' × 2' × 2"
45012R – SOPRA-XPS 60 with straight edges – 8' × 2' × 3"
44544R – SOPRA-XPS 60 with straight edges – 8' × 2' × 2"
44493R – SOPRA-XPS 60 with shiplap edges – 8' × 2' × 3"
44494R – SOPRA-XPS 60 with shiplap edges – 8' × 2' × 4"
44554R – SOPRA-XPS 60 with shiplap edges – 8' × 2' × 4"

SOPRA-XPS 40

EXTRUDED POLYSTYRENE FOAM (XPS) RIGID INSULATION
ISOLANT RIGIDE À BASE DE MOUSSE DE POLYSTYRÈNE EXTRUDÉ (XPS)
AISLAMIENTO RÍGIDO DE ESPUMA DE POLIESTIRENO EXTRUIDO (XPS)

2" THICKNESS
ÉPAISSEUR
GRUOR

R-10

RSI-1.76
51 mm



SOPREMA
SOPREMA US
1.888.248.5521
SOPREMA CA
1.877.747.8400
Made in Canada, 100% de l'usine - Made in Canada
SOPREMA INC. 5110 Dufferin Street, Mississauga, Ontario L4W 1A1 CANADA



SOPREMA®

SOPRA-X

EXTRUDED POLYSTYRENE FOAM (XPS) RIGID INSULATION
ISOLANT RIGIDE À BASE DE MOUSSE DE POLYSTYRÈNE EXTRUDÉ (XPS)
AISLAMIENTO RÍGIDO DE ESPUMA DE POLIESTIRENO EXTRUIDO (XPS)

2" THICKNESS
ÉPAISSEUR
GRUOR

R-10



INSULATION

■ POLYISOCYANURATE

SOPRA-ISO

SOPRA-ISO is a polyisocyanurate insulation board with a closed-cell structure with a fibreglass-reinforced organic coating. Since their R-value is the highest among all types of roof insulation (R-5.7), the result is a thinner yet more efficient roof system. The high dimensional stability of polyisocyanurate prevents the creation of thermal bridges in the roof system.

INTENDED USES:

- Roofing

BENEFITS

- Highest thermal resistance among all types of roof insulation
- Excellent dimensional stability
- Available with straight or shiplap edges for an installation that is twice as fast



SOPRA-ISO PLUS


SOPRA-ISO PLUS is a polyisocyanurate insulation board with a closed-cell structure with a polymer-covered fibreglass coating. Since their R-value is the highest among all types of roof insulation (R-5.7), the result is a thinner yet more efficient roof system. The high dimensional stability of polyisocyanurate prevents the creation of thermal bridges in the roof system.

INTENDED USES:

- Roofing

BENEFITS

- Increased dimensional stability due to fibreglass coating
- Mould resistant



SOPRA-ISO V PLUS

SOPRA-ISO V PLUS is a polyisocyanurate insulation board with a closed-cell structure coated on both sides with non-reflecting fibreglass.

INTENDED USES:

- Walls

BENEFITS

- R-value per inch greater than other types of insulation (R-6/in)
- Durable and lightweight
- Compatible with most solvents used in construction adhesives



SOPRA-ISO V ALU

SOPRA-ISO V ALU is a closed-cell structure polyisocyanurate insulation board with an underface coated with an aluminum reflective layer promoting radiation and a surface coated with an aluminum layer covered with an antireflective acrylic film.

INTENDED USES:

- Walls

BENEFITS

- R-value per inch greater than other types of insulation (R-6.5/in)
- Durable and lightweight
- Compatible with most solvents used in construction adhesives



PRODUCT CODES

POLYISOCYANURATE

SOPRA-ISO

40400-4' x 4' x 1"	40465-8' x 4' x 1"
40405-4' x 4' x 1.5"	40438-8' x 4' x 1.5"
40410-4' x 4' x 2"	40421-8' x 4' x 2"
40415-4' x 4' x 2.5"	40423-8' x 4' x 2.5"
40436-4' x 4' x 3"	40453-8' x 4' x 3"
40433-4' x 4' x 3.5"	40521-8' x 4' x 3.5"
40431-4' x 4' x 4"	40474-8' x 4' x 4"
40288-4' x 4' x 4.5"	40306-8' x 4' x 4.5"
41457-4' x 4' x 5"	41458-8' x 4' x 5"
41461-4' x 4' x 5.5"	41462-8' x 4' x 5.5"
41387-4' x 4' x 6"	41388-8' x 4' x 6"

SOPRA-ISO PLUS

40418-4' x 4' x 1"	40643-8' x 4' x 1"
40419-4' x 4' x 1.5"	40398-8' x 4' x 1.5"
40420-4' x 4' x 2"	40541-8' x 4' x 2"
40452-4' x 4' x 2.5"	40399-8' x 4' x 2.5"
40426-4' x 4' x 3"	40397-8' x 4' x 3"
40802-4' x 4' x 3.5"	40311-8' x 4' x 3.5"
40889-4' x 4' x 4"	41329-8' x 4' x 4"
41059-4' x 4' x 4.5"	41542-8' x 4' x 4.5"
41545-4' x 4' x 5"	41546-8' x 4' x 5"
41553-4' x 4' x 6"	41554-8' x 4' x 6"

SOPRA-ISO V ALU

44340-8' x 4' x 0.5"	44336-8' x 4' x 2.5"
44357-8' x 4' x 0.75"	44347-8' x 4' x 3"
44339-8' x 4' x 1"	44332-8' x 4' x 3.5"
44338-8' x 4' x 1.5"	44333-8' x 4' x 4"
44337-8' x 4' x 2"	

SOPRA-ISO V PLUS

44342-8' x 4' x 0.5"	44346-8' x 4' x 2.5"
44381-8' x 4' x 0.75"	44341-8' x 4' x 3"
44343-8' x 4' x 1"	44334-8' x 4' x 3.5"
44344-8' x 4' x 1.5"	44335-8' x 4' x 4"
44345-8' x 4' x 2"	



INSULATION

■ CELLULOSE

SOPRA-CELLULOSE

INTENDED USES:

- Floors
- Attic
- Interior and exterior walls

CODE: 1000-111

BENEFITS

- High thermal resistance (R-3.7/in)
- Fire resistance and superior acoustic properties
- CAN/ULC-S703 compliant product with superior resistance to corrosion, mould and insects



SOPRA-CELLULOSE VENT

SOPRA-CELLULOSE VENT is a pre-folded rigid cardboard piece perforated along folding lines used to prevent the overflow of SOPRA-CELLULOSE cellulosic fibre on the roof overhang during and after installation. It also maximizes the R-value at the edges of the building and allows good ventilation in the attic. SOPRA-CELLULOSE VENT must be installed with SOPRA-CELLULOSE insulation in ventilated roofs. SOPRA-CELLULOSE VENT XL is longer than the standard version to meet the new attic insulation requirements of provincial and national regulations (up to R-61 or RSI-10.8).

CODES:
1000-228 – 40" × 25.25" (101,6 cm × 64,14 cm)
1000-226 – 27.56" × 25.06" (70 cm × 63,7 cm)



SOPRA-CELLULOSE RULER

SOPRA-CELLULOSE RULER is used to control and verify the thickness of SOPRA-CELLULOSE insulation in attics. It indicates the thickness to be applied in accordance with the thermal resistance of the insulation up to 60 for R-value and 10.8 for RSI.



SOPRA-CELLULOSE MACHINE

Used to insulate attics with cellulose, the SOPRA-CELLULOSE MACHINE is lightweight and easy to transport in two pieces.

It is easy to use with a wireless remote control and offers high efficiency.







SOUNDPROOFING

SOUNDPROOFING


INSONOFLOOR

INSONOFLOOR is a high-density elastomeric SBS-modified bitumen and polyethylene membrane coated with small granules of recycled rubber. It is specially designed to soundproof laminated floating floors and other types of flooring, such as hardwood or multilayer engineered wood.

CODE:
10414 – 35" × 39' (89 cm × 12 m)

BENEFITS

- Superior acoustic performances
- Rotproof
- Adjusts well to the media, resists tearing, and cuts moisture




INSONOMAT

INSONOMAT is an acoustic membrane made from elastomeric bitumen and recycled rubber specially developed for use under a 38 mm (1 1/2 in) thick concrete covering.

CODE:
10413 – 36" × 19.7' (91 cm × 6 m)

BENEFITS

- Contributes to the waterproofing of the structure at the time of concrete casting
- Prevents the water in concrete to evaporate too quickly to increase its quality
- Can be installed and sealed easily with easy-to-use self-adhesive tape



SOPRAWAY NG2

SOPRAWAY NG2 membrane allows the direct application of polymer-modified mortar for any type of tiling. Made of 100% recycled rubber, the SOPRAWAY NG2 membrane can block the spread of cracks in concrete slabs and offers excellent acoustic performance.

CODE:
26132 – 36" × 25' (91 cm × 7.6 m)

BENEFITS

- Reduces impact noise and airborne noise
- 100% recycled content
- Designed according to the LEED® philosophy



SOPRAWAY ADHESIVE

SOPRAWAY adhesive is a homogeneous solvent free, low odour, acrylic latex emulsion based adhesive. SOPRAWAY adhesive is used for interior installation of SOPRAWAY NG2 rubber acoustic membrane.

CODE:
21954 – 19 L (5 gal)

BENEFITS

- Solvent free and low odour
- Easy trowel applied



ACOUSTIZOL

ACOUSTIZOL is an acoustic membrane used on walls and ceilings composed of polyester fibres laminated to a continuous high-density polyethylene complex and aluminum foil.

CODE:
40373 – 48" × 25' (1.2 m × 7.6 m)

BENEFITS

- Increased reduction of airborne noise
- Easy and fast to install
- Hypoallergenic, prevents itching problems



INSONO AF3-47 / 90 / 130

INSONO AF3 self-adhesive membranes are composed of polymer-modified bitumen and an exposed non-woven polyester reinforcement. The self-adhesive underface of the membrane is protected by a silicone release film to allow quick and easy installation.

CODES:
00572 – INSONO AF3-130
36" × 26' (91 cm × 8 m)
00328 – INSONO AF3-90
36" × 49' (91 cm × 15 m)
12050 – INSONO AF3-47
39" × 55' (1 m × 16.76 m)

BENEFITS

- Non-woven polyester reinforcement on the surface allowing direct application and optimum adhesion of a polymer-modified mortar
- Compatible with many types of substrates such as concrete and plywood
- Resists traffic



INSONO AF3 ADHESIVE

INSONO AF3 adhesive is a homogeneous solvent free, low odour, acrylic latex emulsion based adhesive. It is used for interior installation of INSONO AF3 acoustic membrane.

CODE:
24954 – 19 L (5 gal)

BENEFITS

- Solvent free and low odour
- Used for interior installation of INSONO AF3 acoustic membrane.




ACOUSTIVIBE

ACOUSTIVIBE insulators and furrings ensure soundproofing of gypsum ceilings in a unique and innovative way. Instead of directly fastening furrings on the girders or joists, they are suspended with fasteners supplied with a piece of rubber. They absorb shocks and vibrations from the upper floor and prevent their transmission through the ceilings. In this way, the room is isolated from noises caused by footsteps, vacuuming, children playing, etc.

CODES:
21253 – Insulator (100 units)
21254 – 12" (3.65 m) Furrings (10 units)

BENEFITS

- Easy and fast to install
- No specialized tools required
- Increased acoustic performance exceeding requirements



ACOUSTIVIBE WDC

ACOUSTIVIBE WDC anchors are used on structures other than wooden beams or joists. They are used to separate the suspended ceiling from the structure to which it is attached. Hence, they play a vital role in achieving an effective acoustic performance.

CODE:
21727 – 100 units




BENEFITS

- Easy to install
- Resistant
- Elimination of vibration transfer

ACOUSTIVIBE CDC

ACOUSTIVIBE CDC anchors are used on structures made of concrete structural slab, steel with concrete, of Hambro® type or any structures other than wood with concrete on which the ceiling is suspended. They are used to separate the suspended ceiling from the structure to which it is attached. Hence, they play a vital role in achieving an effective acoustic performance.

CODE:
21723 – 100 units



BENEFITS

- Easy to install
- Resistant
- Elimination of vibration transfer

TECSOUND CLG 3900

Single-component acrylic compound used as a soundproofing material for walls and ceilings. TECSOUND CLG 3900 acts as a decoupling material using mass-spring-mass principle by changing the vibration frequency of the assembly, reducing the transmission of airborne noise (ASTM E90) and impact noise (ASTM E492).

CODE :
24514 – 828 ml (28 oz.)

BENEFITS

- Ideal for home remodeling projects
- Solvent-free
- Fast, simple and accessible due to its low technical requirements



TECSOUND CLG 5900

One-component, acrylic sealant used to fill the unseen gaps and joints where the wall meets the floor or ceiling. The TECSOUND CLG 5900 sealant is the first step before the installation of TECSOUND CLG 3900 noiseproofing compound. For interior use.

CODE :
24770 – 828 ml (28 oz.)

BENEFITS

- Seals the cracks and gaps to prevent unwanted noise from escaping or entering a room
- Ideal for new construction or remodeling projects
- Fast, simple and accessible due to its low technical requirements



TECSOUND ACOUSTIC Baffle

Melamine foam panel used for noise absorption and acoustic correction of various types of spaces (offices, businesses, etc.). The TECSOUND ACOUSTIC Baffle panel provides excellent acoustic properties because of its open-cell structure. The panels also integrate well with other interior components.

CODE :
24314 – 1200 mm × 600 mm (47.25" × 23.63")

BENEFITS

- Excellent product designed to absorb noises and attenuate reverberations to reduce echo
- Very light, fibre-free and easy-to-install product
- An aesthetic and acoustic product that integrates well with the interior design



A blue-tinted background image showing a child's hands playing with a ball of yarn. The hands are positioned on the right side of the frame, with one hand holding the yarn and the other reaching towards it. The yarn is a light color, possibly white or light blue, and is being manipulated in a way that suggests a craft or play activity. The overall tone is soft and focused on the tactile nature of the activity.

ALSAN

ALSAN

FOAMS AND SEALANTS

ALSAN FLEX 2945 SB

Alsan Flex 2945 SB is a high performance sealant and adhesive among others due to its superior adhesive properties. Alsan Flex 2945 SB is solvent and isocyanate free which makes it a safe product for installers, building occupants and the environment. With its powerful adhesive strength, this sealant can be applied on dry or wet surfaces. Moisture cure, no shrinkage, UV resistant, 100% waterproof and paintable, this product is an ally for all jobs.

CODES:
24716 – 300 ml (10.1 oz) WHITE
24717 – 300 ml (10.1 oz) BLACK
24718 – 300 ml (10.1 oz) GREY



BENEFITS

- ± 35% joint movement
- For dry or wet surfaces
- Solvent and isocyanate-free

ALSAN FOAM EPS/XPS

Alsan Foam EPS/XPS adhesive will save you time and money when installing polystyrene and polyurethane insulation boards. This low-expansion one-component polyurethane adhesive foam is specially designed to bond all types of polystyrene and polyurethane insulation materials to most construction materials. Compatible with polystyrene and urethane foams, including SOPRA-XPS and SOPRA-ISO.

CODE:
24720 – 750 ml (30 oz)



BENEFITS

- High yield formulation - Cover up to 150 square feet (14 m²)
- Quick installation - less cartridge change
- High grab, Holding power within 2 hours

ALSAN FOAM UNI W PRO

Alsan Foam UNI W insulation foam is the perfect ally for airtightness around doors and windows in the most varied climates. One-component, low-expansion polyurethane foam specifically formulated for use in the widest range of climates and temperatures on windows, doors, gaps and cracks. Exterior and interior uses. Formulated to air seal gaps around rough openings of windows and doors.

CODE:
24721 – 850 ml (Gw. 1000g/35 oz.)



BENEFITS

- Insulates and seals
- Won't bow window and doors frames
- Application in a wide temperature range: -25°C to 30°C (-13°F to 86°F)

ALSAN FOAM UNI W

Alsan Foam UNI W insulation foam is the perfect ally for airtightness around doors and windows in the most varied climates. This low-expansion, one-component polyurethane foam is formulated to air seal gaps around rough openings, save energy and provide permanent adhesion to vinyl, wood and metal, in addition to being airtight and water-resistant.

CODE:
24722 – 500 ml (Gw. 570g/20 oz.)



BENEFITS

- Insulates and seals
- Won't bow window & doors frames
- Application in a wide temperature range: -20°C to 30°C (-4°F to 86°F)

ALSAN FOAM CL-F

Powerful multipurpose aerosol cleaner for removing uncured or fresh polyurethane foam. Formulated to clean foam dispensing guns, tools, and work surfaces.

CODE:
24723 – 500 ml (16.4 oz)

BENEFITS

- Ready-to-use cleaning agent
- Powerful cleaner to remove uncure foam
- Fits directly on PU foam gun or used separately as a handheld aerosol can



ALSAN FOAM GUN FG-ST5

CODE: 24724

The dispensing gun Foam Gun FG-ST5 allows for precision application and easy bead control. It makes it easier to reach tight spaces.

BENEFITS

- Anti-stick coated for easy-cleaning
- Premium reusable tool
- 19 cm (7.5 in.) barrel





NOTES

[illegible]

NOTES

[illegible]

RESISTO®

BUILDING PRODUCTS

Roofing Waterproofing Wall Systems Insulation

1-855-227-7850 | resisto.us